




QUICK GUIDE

Connecting your AINA PTT Voice Responder to Zello

Pairing your PTT Voice Responder with your smartphone via Bluetooth


1. Turn on your PTT Voice Responder by holding down the Power button for more than 3 seconds. After it is on, a blinking green light will indicate that the device is ready for pairing.
2. Turn on your smartphone's Bluetooth by going to: Settings → Bluetooth → Turn on.
3. Pair your PTT Voice Responder to your smartphone by selecting it from the 'Available devices' list*. Once it has successfully paired, a blue light will begin blinking on your device.

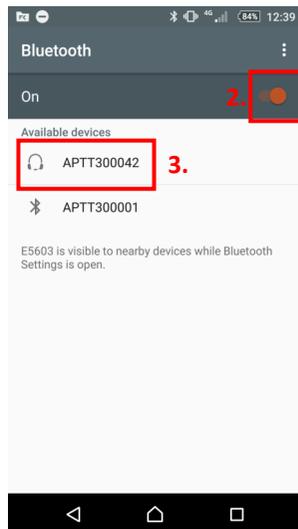

*NOTE: To know which is your device from the Bluetooth 'Available devices' list, check the unique MAC-address on the back of your Voice Responder.


Installing the Zello application into your smartphone

4. From your smartphone, go to the Google Play Store, search for the application called **Zello PTT Walkie Talkie** (4a) and install it (4b).
5. Open the application and create a new account with Zello (5a/ 5b).

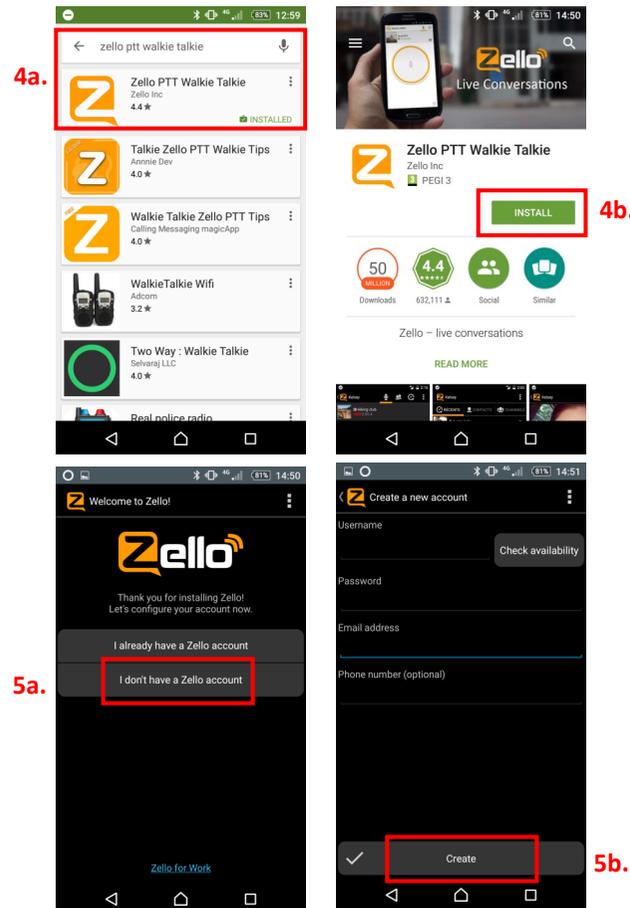

Enabling your PTT Voice Responder within Zello

6. In the Zello application, select the three vertical dots displayed on the top right corner, and from the list select Options.
7. Select 'Push-to-talk button'.
8. Open the 'Bluetooth PTT control device' drop down menu and select your paired PTT Voice Responder.

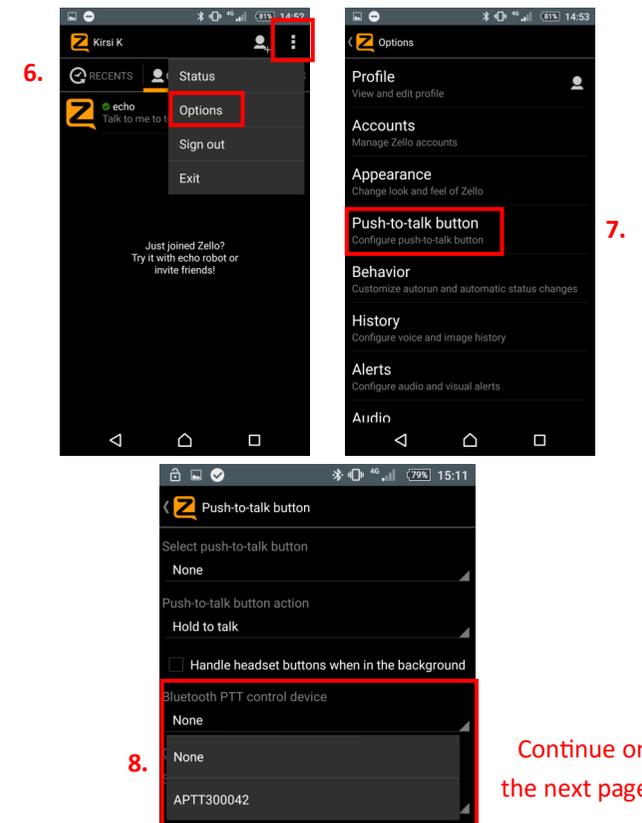

Continue on the next page


QUICK GUIDE

Connecting your AINA PTT Voice Responder to Zello

Using your AINA PTT Voice Responder with Zello

To get to know how your Voice Responder works and sounds with Zello, you can use the 'echo' contact that is automatically included in your Zello contacts list.

1. In the Zello application, select the Contacts tab from the top.
2. In the Contacts menu, select 'echo'.
3. Press and hold the primary PPT button on your Voice Responder. After the audio indication, speak into your Voice Responder. When you are done, release the button.
4. Your message will be played back to you from your device's speaker.

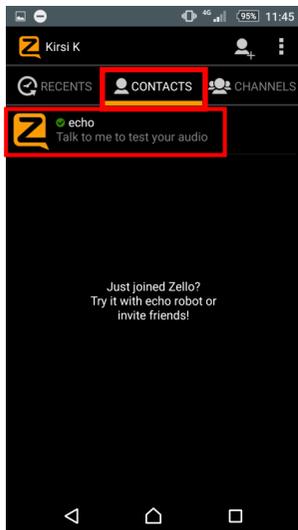

NOTE: Remember to keep your phone close by to allow your Voice Responder to be continuously connected.

AINA PTT Voice Responder's main button functions when connected to Zello



Power ON/ OFF —Press for more than 3 seconds to turn the device on/ off.

Primary PTT —Press and hold to speak. Release when you are done.

Volume buttons—Press and hold to increase/ decrease the speaker's volume.

Soft buttons— Press and hold the left soft button to deactivate the LED. Press and hold both soft buttons to activate **Covert Mode** in which LED indications are suppressed and audio annunciations are selectively muted. Perform the same actions if you would like to go back to the initial set-up.

Software reset—If you want to pair your Voice Responder to another device you need to perform a Software reset by pressing and holding both soft buttons and both PTT buttons simultaneously, until the LED blinks once in yellow.

Additional Information

If you are using your AINA PTT Voice Responder in a loud environment or would simply like to keep your conversations more private, make sure to visit our online store, www.aina-wireless.com/shop, and check out the following AINA headsets and earphones which can easily be connected to your Voice Responder.



Visit www.aina-wireless.com to find an extended user manual of the AINA PTT Voice Responder and additional user guides. If you have any further questions, you can also email us at:

info@aina-wireless.com